





Application Diagram SLICE6 LEO – Sensor Connector Options



80000-04110-R
51-p Connector Assy
- solder cup

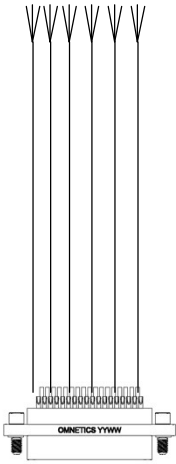

80000-04123-R
51-p Cable Assy
- 18 in leads
- pigtail termination
- alternate 80000-01275



13006-90560
51-p Connector Assy
- solder cup
- backshell



13006-90760
51-p Cable Assy
- 152mm/6 in leads
- 6 x 7-pin circular connectors
(bridge/PR/voltage)
- backshell



13006-90780
51-p Cable Assy
- 152mm/6 in leads
- 3 x 7-pin circular connectors
(bridge/PR/voltage)
- 3 x microdot connectors
(ICP/IEPE)
- backshell



13006-90790
51-p Cable Assy
- 152mm/6 in leads
- 6 x microdot connectors
(ICP/IEPE)
- backshell

13000-30120
1ch, sensor connector Assy



13000-30121
1ch sensor cable Assy
- 5m length
- pigtail termination
*available with 1/4 bridge completion resistor
(13000-30122, 90 in length)



SLICE6 LEO SENSOR INPUT
- 51-s connector
- 6 available inputs for BRIDGE/PR/VOLTAGE or IEPE/ICP sensors



Thermocouple connection available
Contact sales@dtsweb.com for more info

